

8AGC2-DEKA


SPECIFICATIONS

Nominal Voltage (V)	6V
Capacity at C/100	220Ah
Capacity at C/20	190Ah
Weight	70 lbs. (32 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-40°F (-40°C) - 140°F (60°C)

For Charging Parameters please refer to www.mkbattery.com

Click on Technical Data, then on Photovoltaic Charging Parameters in the PV/Solar section

Vent	Self-sealing
Terminal	U (SAE/STUD)



Rated UN2794 - Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

Valve-Regulated, Absorbed Glass Mat Technology




DIMENSIONS

Inches (mm)

Length	10.25 (260 mm)
Width	7.09 (180 mm)
Height	10.88 (276 mm)

AGM Cycle Life vs Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity

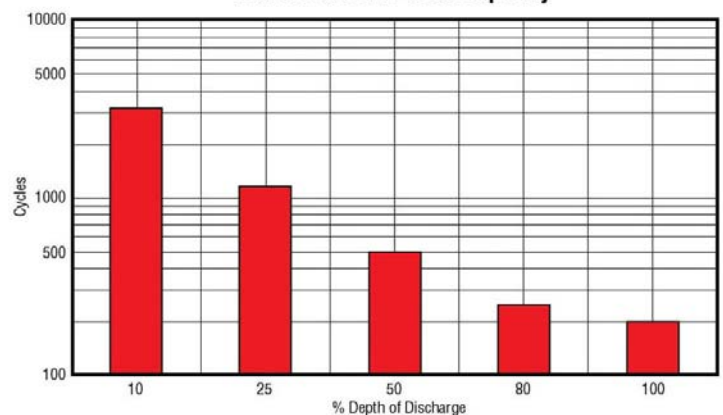

Cycle Chart applies to all MK AGM batteries (except 8AGC2-DEKA cycle chart x 2)

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

